
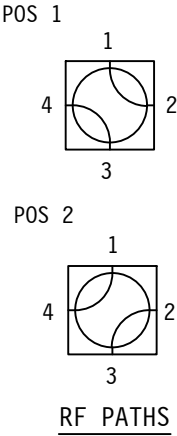
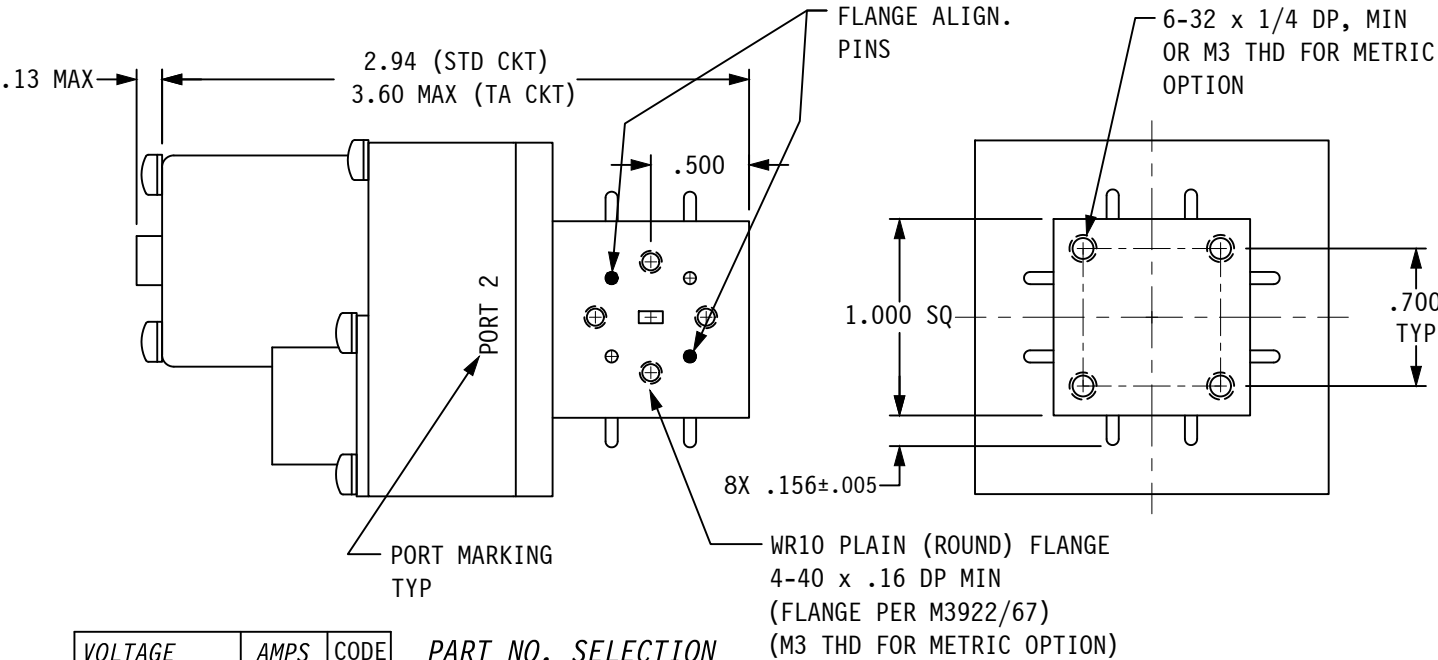


WR10 SERIES

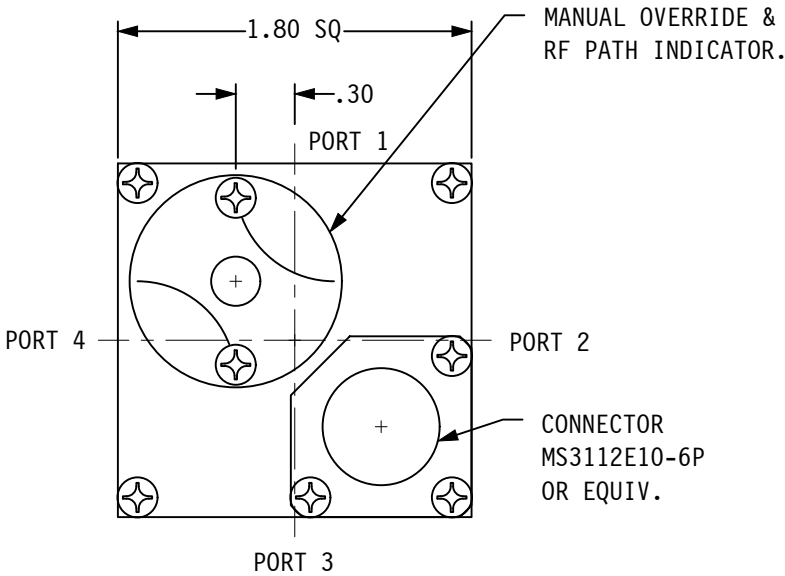

SPECIFICATIONS;
FREQ RANGE (GHz) — 75.0 - 110.0
VSWR — 1.20 : 1 MAX
INSERTION LOSS — 0.40 dB MAX
ISOLATION — 50 dB MIN
SWITCHING TIME — 50 mSec, TYP
PRESSURE — TO 30 PSIG (RF HEAD)
FINISH — CHEM FILM ON FLANGES, SATIN BLACK FINISH ON BODY.

- NOTES:
1. ** MANUAL SWITCH DOES NOT INCLUDE RECEPTACLE.
2. BLUE BOXES ARE REQUIRED FIELDS.
3. !! IF OPTION IS NOT REQUIRED, LEAVE (GOLD BOX) BLANK

VOLTAGE	AMPS	CODE
+22 TO +32	0.9	A
-22 TO -32	0.9	B
+10 TO +14	1.5	C
-10 TO -14	1.5	D
+44 TO +54	0.5	E
-44 TO -54	0.5	F
117VAC	0.5	H
MANUAL **		M

PART NO. SELECTION

!! OPTION	CODE
METRIC THREAD	M

CODE	FLANGE
P	PLAIN (ROUND)


CODE	!! OPTION
TA	STD TTL CKT (10-6P CONN) [SEE SCHEMATIC PAGE]

STANDARD ELECTRICAL CIRCUIT REQUIRES NO CODE DESIGNATION.

10	P
PART NO. SERIES	CODE
SPDT	1
!! OPTION	CODE

PART NO. EX.: 10APM

WR10 LATCHING WG SWITCH, +28VDC, PLAIN ROUND FLANGE, METRIC FLANGE & MTG HOLES ON BOTTOM

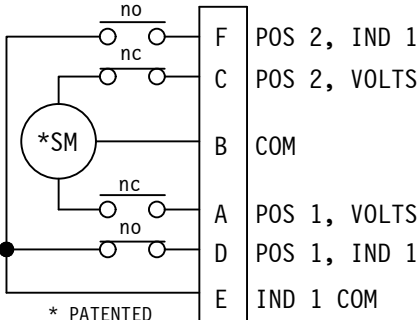

STD. ELECTRICAL CKT.
Shown in Position 1
ONE FORM C

WEB SITE: www.sectormicrowave.com

ZONE	LTR	DESCRIPTION	APV	DATE
	E	CHANGED TO M3 THD FOR FLANGE HOLES IN METRIC OPTION	TN	8/13/18
	D	CLARIFIED OVERALL DIMS FOR STD AND TA CKT.	TN	6/17/16
	C	ADDED TA OPTION.	RR	9/2/14
	B	DELETED FAILSAFE OPTION	TN	2/12/08
	A	ADDED NOTE 1 & CALLOUTS. CLARIFIED FLANGE INFO.	AC	12/21/98

TOLERANCES:
DECIMALS
2 PLACES: +/- .03
3 PLACES: +/- .010
FRACTIONS: +/- 1/64
ANGLES: +/- 1/2 deg.

DRAWN	A.C.	10/17/97
CHECKED		
APVD	J.P.	10/17/97
APVD		

SECTOR MICROWAVE IND., INC.			
WR10 WG SW. : LIGHTWT. SER.			
SIZE L	CAGE CODE 53263	WR10 SERIES	E
SCALE: 1/1	UNIT WT.	SHEET 1 OF 1	REV.